



SIL-AIR

SIL-AIR 100/24



100 l/min - 3.53 CFM

8 bar - 116 psi

Modello carrellato con 2 motori
 Trolley-mounted model with two motors
 Modèle sur chariot avec 2 moteurs
 Fahrbares Modell mit 2 Verdichtern
 Modelo con ruedas y 2 motores


SIL-AIR 100/24 V

Modello con ventole di raffreddamento
 Model with cooling fans
 Modèle avec ventilateurs de refroidissement
 Modell mit Kühlventilatoren
 Modelo con ventiladores de enfriamiento

Volt/Hz	l/min (CFM) *	l (Gal.)	Watt	dBA	Kg (Lbs)	Kg (Lbs)
230/50	74 (2.6)	24 (6.34)	680	42	50 (110)	55 (121)
115/60	88 (3.1)		800			

* = @ 5 bar (72.5 PSI)

	A mm	B mm	C mm
	360	650	550
	370	800	650

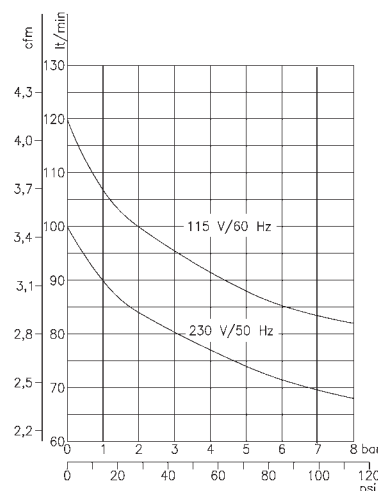

OPZIONI / OPTIONALS / OPTIONS / SONDERZUBEHÖR / OPCIONES



SIL-AIR 100/24 AL

Motori con coperchi alettati
 Motors with cooling heads
 Moteurs avec couvercles à ailettes
 Motoren mit Kühlrippen
 Motores con cabezas aletadas